

PCB Connector Series

KLS1-540A Pitch=2.54mm TYPE

Electrical Specification:




Current Rating: 3 AMP
 Insulator Resistance: 5000M Ohm min. at DC 500V
 Contact Resistance: 20m Ohm max. at DC 100mA
 Withstand voltage: 800V AC/MIN
 Operating Temperature: -55°C~+105°C

Material:

Housing: Nylon 66 UL94V-0
 Contacts: Phosphor Bronze
 Plating: Tin 50u" over 100u" nickel



Housing 540A

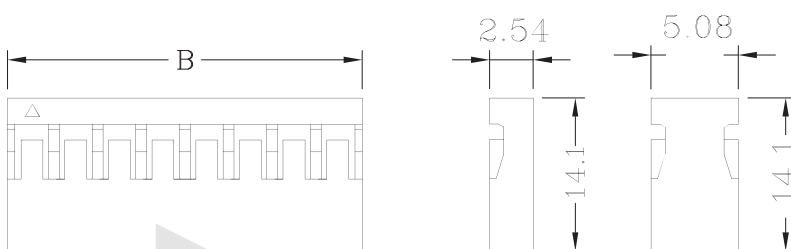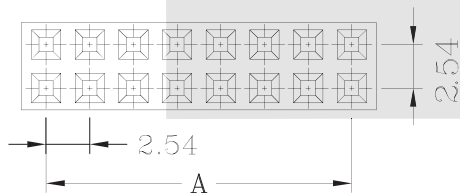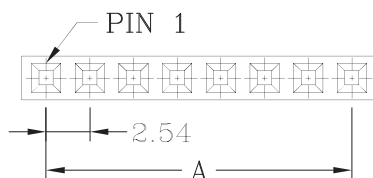

Part No	Dimensions		Part No	Dimensions	
	A	B		A	B
1x2P	2.54	5.08	2x2P	2.54	5.08
1x3P	5.08	7.62	2x3P	5.08	7.62
1x4P	7.62	10.16	2x4P	7.62	10.16
1x5P	10.16	12.70	2x5P	10.16	12.70
1x6P	12.70	15.24	2x6P	12.70	15.24
1x7P	15.24	17.78	2x7P	15.24	17.78
1x8P	17.78	20.32	2x8P	17.78	20.32
1x9P	20.32	22.86	2x9P	20.32	22.86
1x10P	22.86	25.40	2x10P	22.86	25.40
1x11P	25.40	27.94	2x11P	25.40	27.94
1x12P	27.94	30.48	2x12P	27.94	30.48
1x13P	30.48	33.02	2x13P	30.48	33.02
1x14P	33.02	35.56	2x14P	33.02	35.56
1x15P	35.56	38.10	2x15P	35.56	38.10
1x16P	38.10	40.64	2x16P	38.10	40.64
1x17P	40.64	43.18	2x17P	40.64	43.18
1x18P	43.18	45.72	2x18P	43.18	45.72
1x19P	45.72	48.26	2x19P	45.72	48.26
1x20P	48.26	50.80	2x20P	48.26	50.80
1x21P	50.80	53.34	2x21P	50.80	53.34
1x22P	53.34	55.88	2x22P	53.34	55.88
1x23P	55.88	58.42	2x23P	55.88	58.42
1x24P	58.42	60.96	2x24P	58.42	60.96
1x25P	60.96	63.50	2x25P	60.96	63.50

ORDER INFORMATION

Product NO.: KLS1-540 A-1X02-H

Series No. _____ Type: H-Housing T-Terminal
 Pitch: A=2.54mm B=2.00mm
 PIN Number: 02 ~ 25Pin
 Pins: 1-Single layer
 2-Double layer