

DESCRIPTION: MICRO D-SUB CONNECTOR - FEMALE

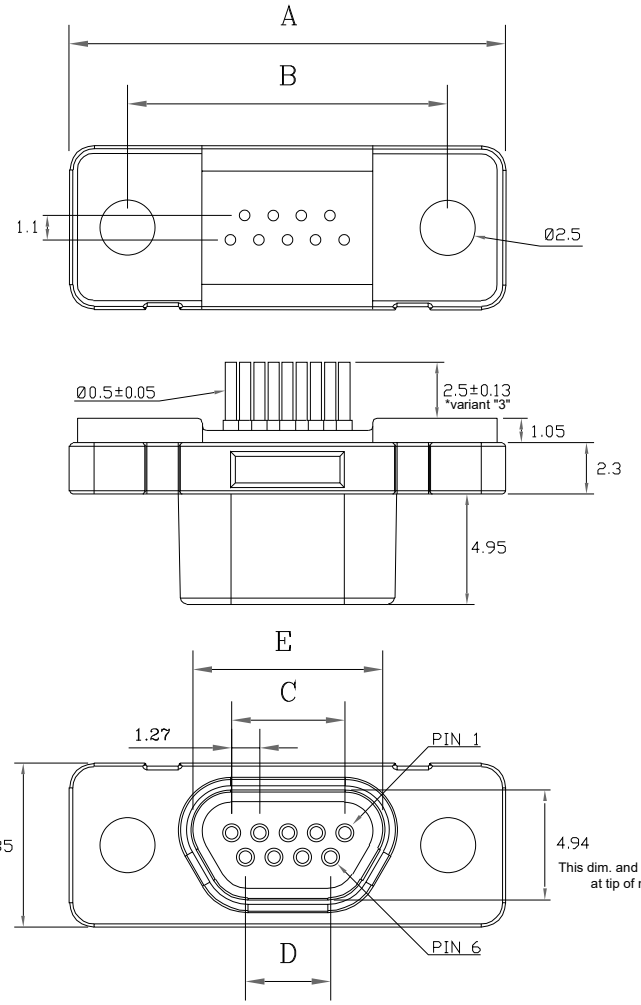



NESTED
SOLID BARREL
CONTACT

SPECIFICATIONS:

ELECTRICAL:

INSULATOR RESISTANCE:	1000 MOHMS MIN.
SIGNAL CONTACT RESISTANCE:	45 mOHMS MAX.
CONTACT CURRENT RATING:	1 AMP
D.W.V.:	500VAC
OPERATING TEMPERATURE:	-40°C TO 85°C

MATERIALS:

INSULATOR:	PBT UL94V-0, BLK 230°C MAX PROCESS TEMP
SHELL:	ZINC ALLOY
CONTACTS:	15u" GOLD PLATED BRASS

DIMENSIONS(mm)					
SIZE	A	B	C	D	E
9	19.55	14.35	5.08	3.81	8.72
15	23.36	18.16	8.89	7.62	12.53
25	29.70	24.51	15.24	13.97	18.88

NOTE:
**NOT DESIGNED TO MATE WITH NORCOMP 580-M // 581-M SERIES CONNECTORS.
IF ANY QUESTIONS PLEASE CONTACT ENG@NORCOMP.NET

380-YYY-21YL001

SERIES
POSITIONS
- 009
- 015
- 025

PCB CONTACT LENGTH
- 3 = 2.50mm
- A = 4.44mm

RoHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: M. SIGMON

DATE: 08/19/2011

TOLERANCES
.x ±0.20
.xx ±0.15
.xxx ±0.10
.xxxx ±0.05
ANGULAR ±1°

NorComp

SCALE: NTS


SHEET 1 OF 2

REV 17


DWG NO. 380-YYY-213L001

DESCRIPTION: MICRO D-SUB CONNECTOR - FEMALE


9 POSITION

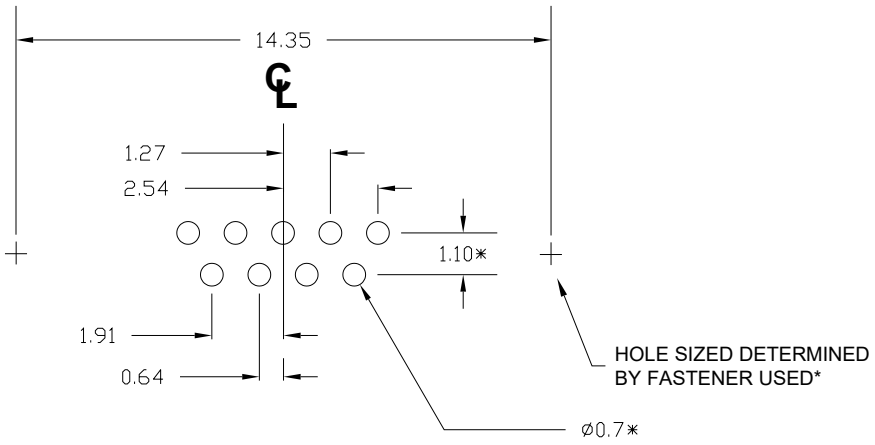

15 POSITION

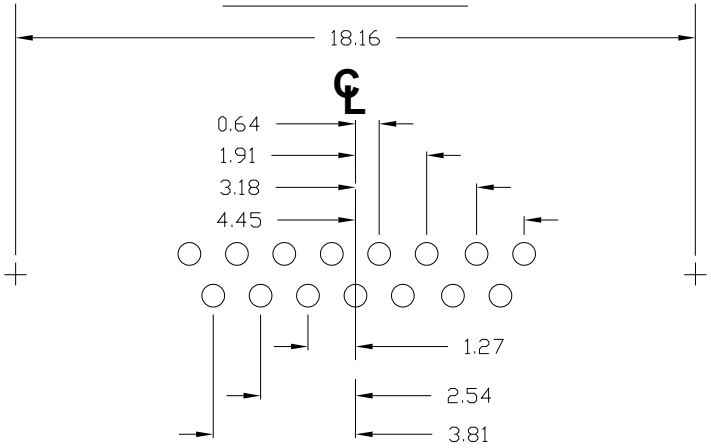

25 POSITION

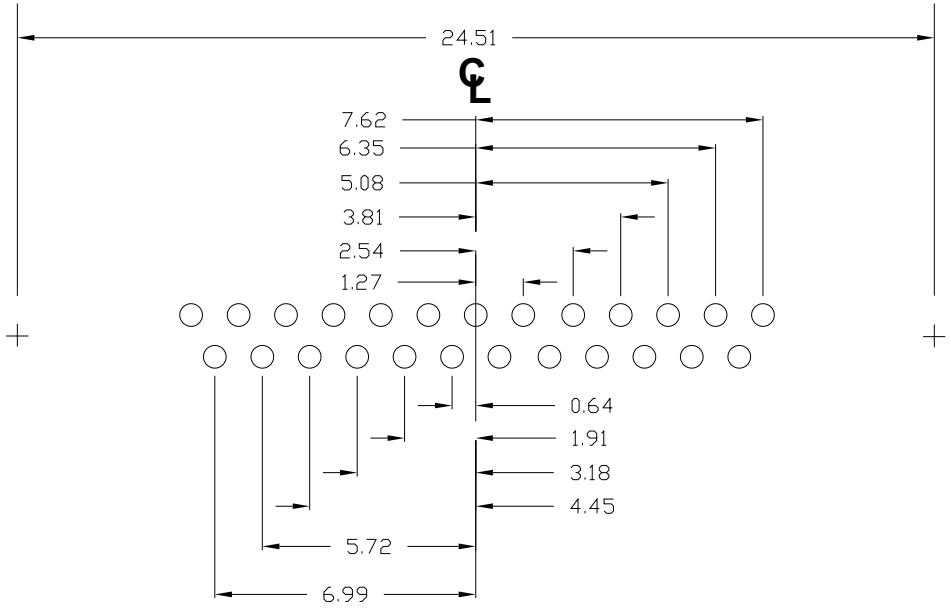

*TYPICAL
PLEASE TEST WITHIN
YOUR SOLDERING
OPERATION TO ENSRUE
THIS IS SUITABLE

RoHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:	DATE:
M. SIGMON	08/19/2011

NorComp

SCALE:	SHEET	OF	REV
NTS	2	2	17

DWG NO. 380-YYY-213L001